

NSCaster-X1

HIGHLY INTEGRATED PRODUCTION TOOL - AWESOME FEATURE SET



Optional External Control



ALL IN ONE

- Streaming - Recording- Switcher
- Easy to use - Touchscreen GUI
- Lightweight - Robust - Portable
- PTZ Camera Control + Automation
- CG Overlays - PIPs - Transitions
- Projectbased Workflows
- Use Mobilephone as Ext. Camera
- Monitor / Multiviewer Output
- IP - SDI/HDMI - opt. NDI | HX IO
- WiFi - RJ45 - 4G Connectivity
- Multi Language GUI
- REST API

NAGASOFTSALES.COM

NSCaster-X1

HIGHLY INTEGRATED PRODUCTION TOOL - AWESOME FEATURE SET



Optional External Control



ALL IN ONE

- Streaming - Recording- Switcher
- Easy to use - Touchscreen GUI
- Lightweight - Robust - Portable
- PTZ Camera Control + Automation
- CG Overlays - PIPs - Transitions
- Projectbased Workflows
- Use Mobilephone as Ext. Camera
- Monitor / Multiviewer Output
- IP - SDI/HDMI - opt. NDI | HX IO
- WiFi - RJ45 - 4G Connectivity
- Multi Language GUI
- REST API

NAGASOFTSALES.COM

NSCaster-X1

HIGHLY INTEGRATED PRODUCTION TOOL - AWESOME FEATURE SET




Optional External Control



ALL IN ONE

- Streaming - Recording- Switcher
- Easy to use - Touchscreen GUI
- Lightweight - Robust - Portable
- PTZ Camera Control + Automation
- CG Overlays - PIPs - Transitions
- Projectbased Workflows
- Use Mobilephone as Ext. Camera
- Monitor / Multiviewer Output
- IP - SDI/HDMI - opt. NDI | HX IO
- WiFi - RJ45 - 4G Connectivity
- Multi Language GUI
- REST API

NAGASOFTSALES.COM

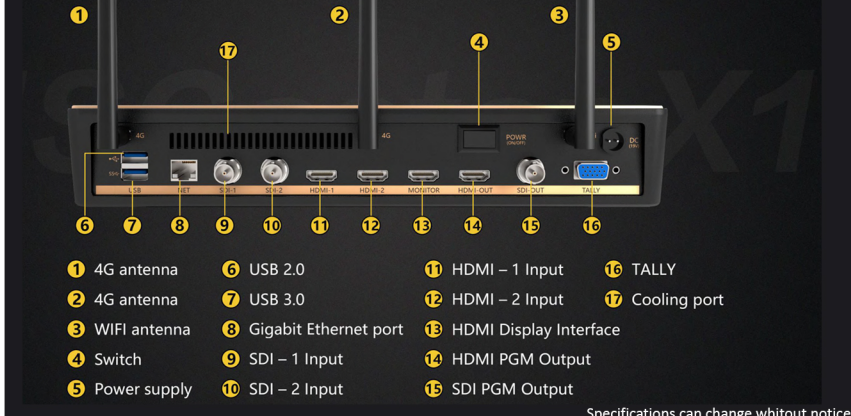

CE Certificate Number: BCTC-FYC19062503C
 FCC Part 15.247 ANSI C63.10:2013 Report Nr. FY190703908E
 TCB FCC Rule 15C: 2A17D-NS
 ISO 9001 USA19Q42643R2M - ISO 14001 USA19E42644R1M

DISTRIBUTION



- **INPUT:** 2x 3G-SDI - 2x HDMI / opt. NDI |HX H264 over IP (RTMP/RTSP/UDP/M3U8/SRT)
- **OUTPUT:** 1x3G-SDI PGM - 1xHDMI PGM/Multi 1x HDMI Display interface / SRT / opt. NDI |HX
- (W x H x D) 294mm*193mm*54mm
Weight 1.25KG / with Packaging 5KG
- Portable Chassis with 11.6 inch touchscreen
- PTZ Camera Protocol: ONVIF / VISCA over IP/ VISCA over IP (RAW) - (Tally support)
- Video Res:


1920x1080p@60/50fps	1280x1024p@60fps
1920x1080p@30/25/24fps	1280x960p@60fps
1920x1080i@60/50fps	1024x768p@60fps
1280x720p@60/50fps	800x600p@60fps
720x480i@60fps	640x480p@60fps
720x576i@50fps	720x480p@60fps
	720x576p@50fps

HDMI

■ HS code 8471309000 EAN/UPC 0754083716913

Example: 5 channels can be used for RTMP/RTSP input
 Out: Facebook+Youtube+2RTMP+2SRT
 Tech. Limit: 300fps and I/O 80 Mbps total

NAGASOFTSALES.COM
 Subject to change without notice

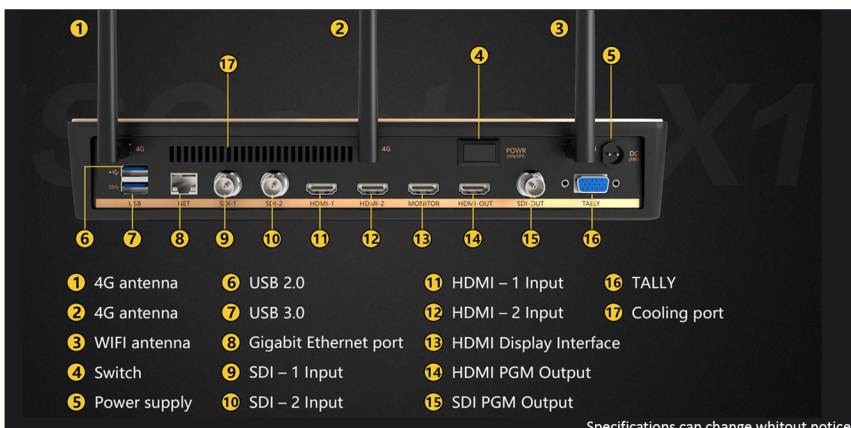

CE Certificate Number: BCTC-FYC19062503C
 FCC Part 15.247 ANSI C63.10:2013 Report Nr. FY190703908E
 TCB FCC Rule 15C: 2A17D-NS
 ISO 9001 USA19Q42643R2M - ISO 14001 USA19E42644R1M

DISTRIBUTION



- **INPUT:** 2x 3G-SDI - 2x HDMI / opt. NDI |HX H264 over IP (RTMP/RTSP/UDP/M3U8/SRT)
- **OUTPUT:** 1x3G-SDI PGM - 1xHDMI PGM/Multi 1x HDMI Display interface / SRT / opt. NDI |HX
- (W x H x D) 294mm*193mm*54mm
Weight 1.25KG / with Packaging 5KG
- Portable Chassis with 11.6 inch touchscreen
- PTZ Camera Protocol: ONVIF / VISCA over IP/ VISCA over IP (RAW) - (Tally support)
- Video Res:


1920x1080p@60/50fps	1280x1024p@60fps
1920x1080p@30/25/24fps	1280x960p@60fps
1920x1080i@60/50fps	1024x768p@60fps
1280x720p@60/50fps	800x600p@60fps
720x480i@60fps	640x480p@60fps
720x576i@50fps	720x480p@60fps
	720x576p@50fps

HDMI

■ HS code 8471309000 EAN/UPC 0754083716913

Example: 5 channels can be used for RTMP/RTSP input
 Out: Facebook+Youtube+2RTMP+2SRT
 Tech. Limit: 300fps and I/O 80 Mbps total

NAGASOFTSALES.COM
 Subject to change without notice

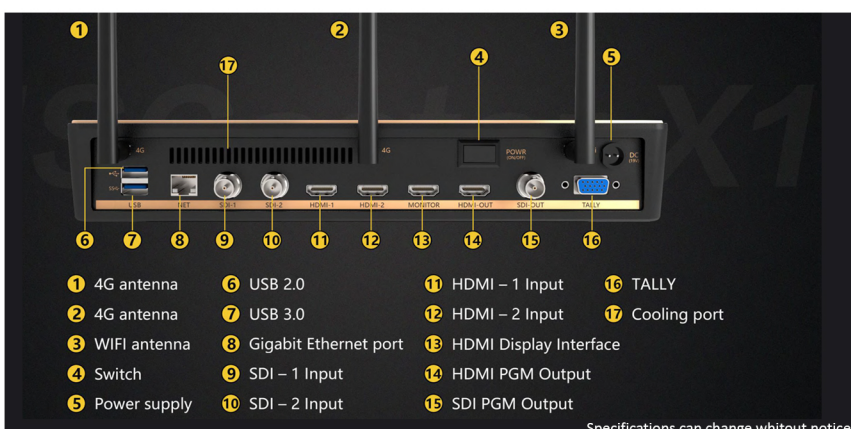

CE Certificate Number: BCTC-FYC19062503C
 FCC Part 15.247 ANSI C63.10:2013 Report Nr. FY190703908E
 TCB FCC Rule 15C: 2A17D-NS
 ISO 9001 USA19Q42643R2M - ISO 14001 USA19E42644R1M

DISTRIBUTION



- **INPUT:** 2x 3G-SDI - 2x HDMI / opt. NDI |HX H264 over IP (RTMP/RTSP/UDP/M3U8/SRT)
- **OUTPUT:** 1x3G-SDI PGM - 1xHDMI PGM/Multi 1x HDMI Display interface / SRT / opt. NDI |HX
- (W x H x D) 294mm*193mm*54mm
Weight 1.25KG / with Packaging 5KG
- Portable Chassis with 11.6 inch touchscreen
- PTZ Camera Protocol: ONVIF / VISCA over IP/ VISCA over IP (RAW) - (Tally support)
- Video Res:

1920x1080p@60/50fps	1280x1024p@60fps
1920x1080p@30/25/24fps	1280x960p@60fps
1920x1080i@60/50fps	1024x768p@60fps
1280x720p@60/50fps	800x600p@60fps
720x480i@60fps	640x480p@60fps
720x576i@50fps	720x480p@60fps
	720x576p@50fps

HDMI

■ HS code 8471309000 EAN/UPC 0754083716913

Example: 5 channels can be used for RTMP/RTSP input
 Out: Facebook+Youtube+2RTMP+2SRT
 Tech. Limit: 300fps and I/O 80 Mbps total

NAGASOFTSALES.COM
 Subject to change without notice