



## iTANK i310-B31+

1-Bay 2.5"/3.5" SATA III HDD/SSD Storage


USB 3.1 Gen 2 Type-C, One USB 3.1 Gen2 Type-C port which supports 24W USB Power Delivery, And One Mini DisplayPort for DP1.1a, Hot-Swappable Drive

The i310-B31+ supports USB 3.1 Gen 2 Protocol which gives you an up to 10Gbps data transfer rate. You could easily use it for storage data and editing your huge photo galleries directly from your Macbook Pro (Type-C) from its easy and friendly to use features. The Type-C connector provides 5V/3A (15W), 9V/2A (18W), and 12V/2A (24W) USB Power Delivery (PD) that can charging the laptop when data been accessing. i310-B31+ also provides one mini Display port for 2nd monitor expansion.

### Features

1. Hard Drive External Storage for Mac OS and Windows PC.
2. USB 3.1 Gen 2 brings you 10Gbps extreme high data transfer speed.
3. Support USB Type-C interface, Plug and Play.
4. Hot-Swappable Drive, i310-B31+ to support 1 x 3.5"/2.5" SATA HDD/SSD.
5. Designed with Aluminum Construction for High Quality and Fast Heat Dissipation.
6. i310-B31+ that does it all.
  - Support 24W (12V/2A)/18W (9V/2A)/15W (5V/3A) Power Delivery.
  - Mini DP 1.1a DisplayPort connect DVI, HDMI, VGA display devices.



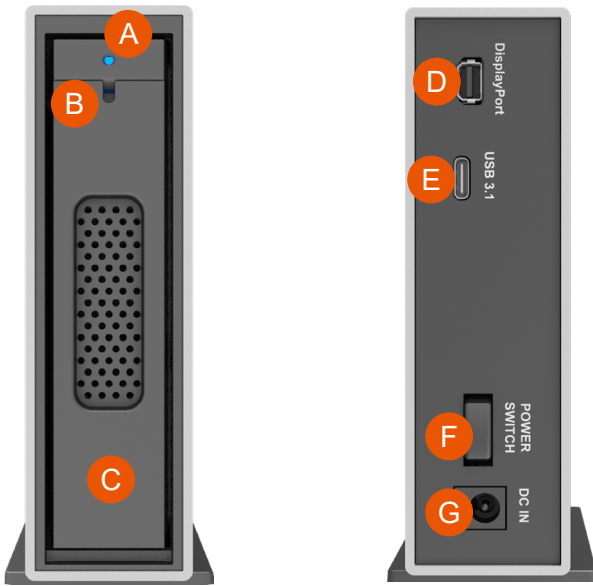

**Support USB Power Delivery (USB-PD)**

USB Power Delivery (USB-PD for short) introduces fast charging technology and unified cable standards for the USB Developer Forum (USB-IF). The i310-B31+ supports USB-PD. If the USB Type-C to USB Type-C interface is used, 5V/3A (15W), 9V/2A (18W), and 12V/2A (24W) power can be supplied to the host.

- A. HDD access light
- B. HDD enclosure keylock
- C. HDD tray ejection
- D. Mini DisplayPort (DP1.1a)
- E. USB 3.1 Gen2 Type-C (10Gbps)
- F. Power switch
- G. Power socket

### Technical Specification

i310-B31+	
Interface	1 x USB 3.1 Gen2 Type-C (10Gbps) 1 x Mini DisplayPort (DP1.1a)
USB Power Delivery	5V/3A (15W), 9V/2A (18W), and 12V/2A (24W)
Compatible Drive	1 x 3.5"/2.5" SATA III HDD/SSD ( up to 6 Gbps ) Support large volume up to 14TB
Certification	CE/FCC
Storage Mode	JBOD - Independent Mode
Operating System Support	Windows 7 or above, OS X 10.10 or above
Electrical and Operating Requirements	<ul style="list-style-type: none"> <li>• Line voltage: 100-240V AC</li> <li>• Frequency: 50Hz to 60Hz, single phase</li> <li>• Operating temperature: 32° to 104° F (0° to 40° C)</li> <li>• Storage temperature: -4° to 116° F (-20° to 47° C)</li> <li>• Relative humidity: 5% to 95% noncondensing</li> </ul>
Size	Height : 131 mm    Width : 50 mm    Depth : 224 mm
Product Code	i310-B31+    EAN : 4713227440622    UPC : 884826505204
Carton	10 pcs per carton
Package Accessories	<ul style="list-style-type: none"> <li>• i310-B31+ x 1 (with 3.5" / 2.5" removable drive tray enclosed x1)</li> <li>• USB3.1 Cable x 1 (Type-C to Type-C) Cable x 1 (USB-IF Certified)</li> <li>• AC Power Adapter x 1</li> <li>• Power Cable x 1</li> <li>• User Manual x 1</li> <li>• Screws &amp; Keys</li> </ul>